


## Flex 120led/m 9,6W/m 12V/24V 3000K side view

Flexible led strip 120led/meter 9,6W/meter 12V/24V 3000K side view

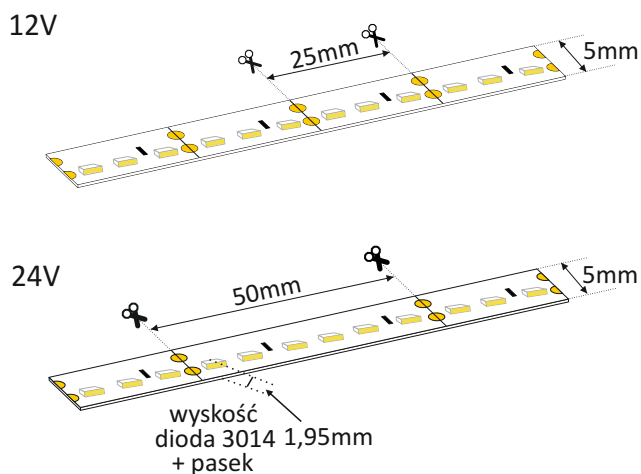

### Warianty:

Options:

- Flex 120LED/m 9,6W/m 5mm 12V 3000K side view
- Flex 120LED/m 9,6W/m 5mm 24V 3000K side view

Zasilanie Voltage	12V DC	24V DC
Moc Power	9,6W/m	9,6W/m
Prąd na led Current per led	20mA/led	20mA/led
Typ diody Led type	SMD 3014	SMD 3014
Kąt świecenia Viewing Angle	120°	120°
Ilość diod/metr Number of lights/1meter	120led/m	120led/m
Strumień świetlny Luminous flux	8lm/LED, 960lm/metr	8lm/LED, 960lm/metr
Przedział temperaturowy Temperature range	2800K - 3200K	2800K - 3200K
Szerokość taśmy Led strip width	5mm	5mm
Sekcja cięcia Cut point every	25mm	50mm
Żywotność Lifetime	50000 h	50000 h
Temperatura pracy Work temperature	-20°C +60°C	-20°C +60°C
Poziom ochrony Protection rank	IP20	IP20
CRI	>80	>80