


## Flex 120led/m 9,6W/m 12V/24V 4000K side view

Flexible led strip 120led/meter 9,6W/meter 12V/24V 4000K side view

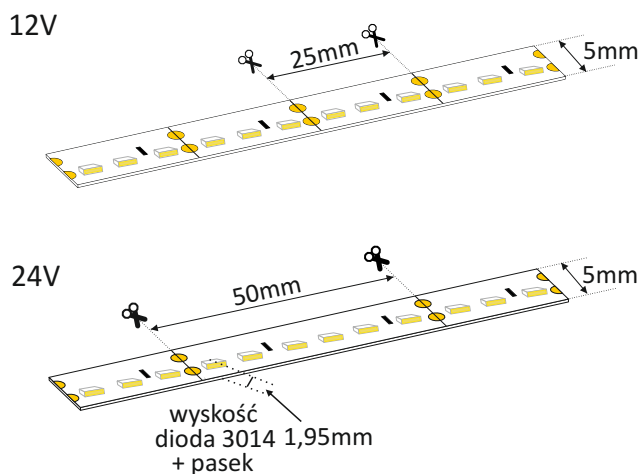

### Warianty:

Options:

- Flex 120LED/m 9,6W/m 5mm 12V 4000K side view
- Flex 120LED/m 9,6W/m 5mm 24V 4000K side view

| Zasilanie<br>Voltage                         | 12V DC              | 24V DC              |
|--|---------------------|---------------------|
| Moc<br>Power                                 | 9,6W/m              | 9,6W/m              |
| Prąd na led<br>Current per led               | 20mA/led            | 20mA/led            |
| Typ diody<br>Led type                        | SMD 3014            | SMD 3014            |
| Kąt świecenia<br>Viewing Angle               | 120°                | 120°                |
| Ilość diod/metr<br>Number of lights/1meter   | 120led/m            | 120led/m            |
| Strumień świetlny<br>Luminous flux           | 8lm/LED, 960lm/metr | 8lm/LED, 960lm/metr |
| Przedział temperaturowy<br>Temperature range | 4000K - 4500K       | 4000K - 4500K       |
| Szerokość taśmy<br>Led strip width           | 5mm                 | 5mm                 |
| Sekcja cięcia<br>Cut point every             | 25mm                | 50mm                |
| Żywotność<br>Lifetime                        | 50000 h             | 50000 h             |
| Temperatura pracy<br>Work temperature        | -20°C +60°C         | -20°C +60°C         |
| Poziom ochrony<br>Protection rank            | IP20                | IP20                |
| CRI  | >80                 | >80                 |