


## Flex 60led/m 4,8W/m 12V/24V 4000K side view

Flexible led strip 60led/meter 4,8W/meter 12V/24V 4000K side view

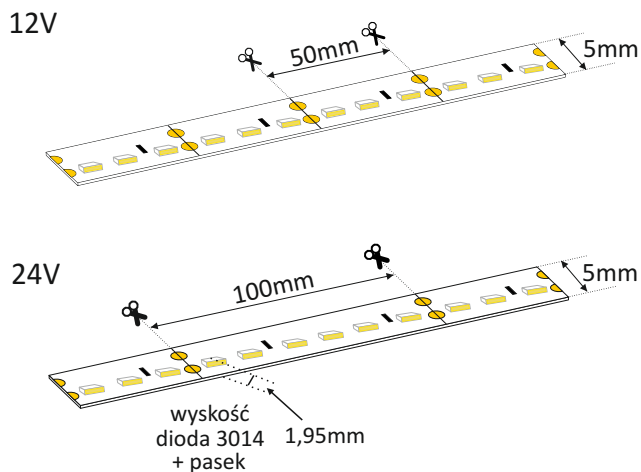

### Warianty:

Options:

- Flex 60LED/m 4,8W/m 5mm 12V 4000K side view
- Flex 60LED/m 4,8W/m 5mm 24V 4000K side view

Zasilanie Voltage	12V DC	24V DC
Moc Power	4,8W/m	4,8W/m
Prąd na led Current per led	20mA/led	20mA/led
Typ diody Led type	SMD 3014	SMD 3014
Kąt świecenia Viewing Angle	120°	120°
Ilość diod/metr Number of lights/1meter	60led/m	60led/m
Strumień świetlny Luminous flux	8lm/LED, 480lm/metr	8lm/LED, 480lm/metr
Przedział temperaturowy Temperature range	4000K - 4500K	4000K - 4500K
Szerokość taśmy Led strip width	5mm	5mm
Sekcja cięcia Cut point every	50mm	100mm
Żywotność Lifetime	50000 h	50000 h
Temperatura pracy Work temperature	-20°C +60°C	-20°C +60°C
Poziom ochrony Protection rank	IP20	IP20
CRI	>80	>80