

Taśma LED 128Led/m 24V


Flexible LED strip 128led/m 24V

Specyfikacja:
Technical specifications:

Zasilanie Voltage	24V DC
Dioda LED LED type	SMD 2835(~130lm/W) SMD 2835 CREE(~200lm/W) SMD 2835 CREE(~175lm/W)
Ilość LED LED quantity	128led/m
Kąt świecenia Beam Angle	120°
Szerokość(mm) Width(mm)	4mm
Sekcja cięcia Cutting section	62,5mm
Temperatura pracy Work temperature	- 20° C + 60° C
Żywotność Lifetime	50 000h
Gwarancja Warranty	3 lata/years
Poziom ochrony Protection IP	IP20
CRI	>80

Akcesoria
Accessories

RADIATOR
STA 30




Dostępne kolory
Available LEDs colors

2700K 3000K 3500K 4000K 6500K 10000K

i Taśma LED do podświetlania kątownego paneli/kasetonów
LED strip for corner illumination of LED panels/boxes

Moc(W), jasność świecenia(lm) taśm led możemy modyfikować pod życzenie klienta.
The power(W) and brightness(lm) of the LED strips can be modified at the customer's request.

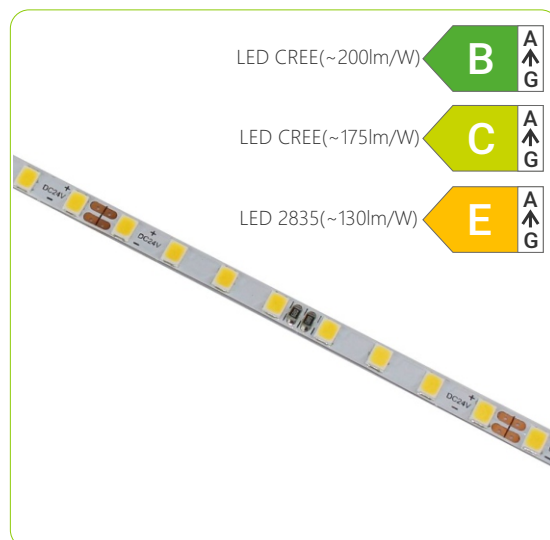

Warianty:
Options:

LED STANDARD(~130lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	7,7W	20mA	~1095lm
M	11,6W	30mA	~1640lm
L	15,5W	40mA	~2190lm

LED CREE(~175lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	7,7W	20mA	~1350lm
M	11,6W	30mA	~2030lm
L	15,5W	40mA	~2700lm

LED CREE(~200lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	7,7W	20mA	~1600lm
M	11,6W	30mA	~2300lm
L	15,5W	40mA	~3000lm

