


Taśma LED CCT 160Led/m 24V CCT Flexible LED strip 160led/m 24V

Specyfikacja:
Technical specifications:

Zasilanie Voltage	24V DC
Dioda LED LED type	SMD 2835(~130lm/W) SMD 2835 CREE(~200lm/W) SMD 2835 CREE(~175lm/W)
Ilość LED LED quantity	160LED/m(2x80LED)
Kąt świecenia Beam Angle	120°
Szerokość(mm) Width(mm)	4mm
Sekcja cięcia Cutting section	100mm
Temperatura pracy Work temperature	- 20° C + 60° C
Żywotność Lifetime	50 000h
Gwarancja Warranty	3 lata/years
Poziom ochrony Protection IP	IP20
CRI	>80

Akcesoria
Accessories


RADIATOR
STA 30




Dostępne kolory
Available LEDs colors

2700K 3000K 3500K 4000K 6500K 10000K

4mm



1,4mm

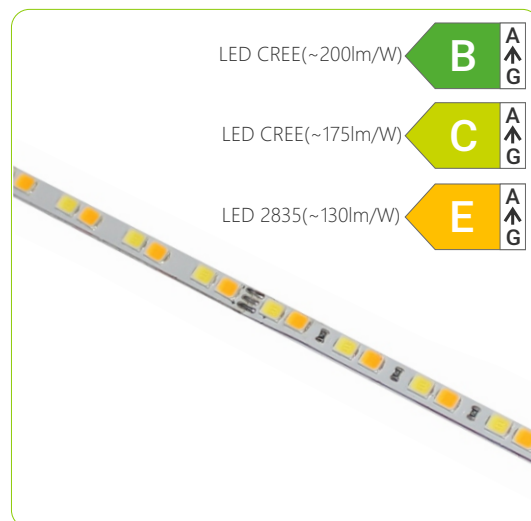

Warianty:
Options:

LED STANDARD(~130lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	2x4,8W	2x20mA	2x~650lm
M	2x7,2W	2x30mA	2x~950lm
L	2x9,6W	2x40mA	2x~1260lm

LED CREE(~175lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	2x4,8W	2x20mA	2x~850lm
M	2x7,2W	2x30mA	2x~1250lm
L	2x9,6W	2x40mA	2x~1680lm

LED CREE(~200lm/W)

Wariant Option	Moc/m Power/m	Prąd/LED Current/LED	Lumeny/m Lumens/m
S	2x4,8W	2x20mA	2x~1000lm
M	2x7,2W	2x30mA	2x~1450lm
L	2x9,6W	2x40mA	2x~1900lm

i Taśma LED do podświetlania kątownego paneli/kasetonów
LED strip for corner illumination of LED panels/boxes

Moc(W), jasność świecenia(lm) taśm led możemy modyfikować pod życzenie klienta.
The power(W) and brightness(lm) of the LED strips can be modified at the customer's request.

